


Leichte Ganzstahl- Schraubzwinge Light Clamp / Forged

	A	B	HxS	L	C		
Code	(mm)	(mm)	(mm)	(mm)	(mm)	gr	
60107020160	160	80	15.5x7.5	220	110	610	12
60107020200	200	80	15.5x7.5	260	110	650	12
60107020250	250	80	15.5x7.5	310	110	700	12
60107020300	300	80	15.5x7.5	360	110	750	12



Spannkraft
Clamping Force
max. 6000 N

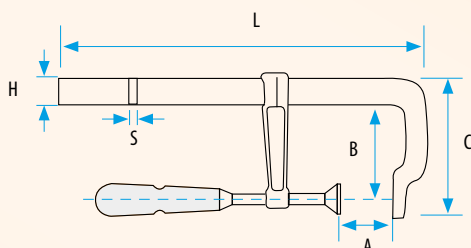

Schwere Ganzstahl-Schraubzwinge Heavy Duty Clamp / Forged

	A	B	HxS	L	C		
Code	(mm)	(mm)	(mm)	(mm)	(mm)	gr	
60107010200	200	140	29.7x14.3	330	195	2550	6
60107010250	250	140	29.7x14.3	375	195	2650	6
60107010300	300	140	29.7x14.3	435	195	2800	6
60107010400	400	140	29.7x14.3	530	195	3100	6
60107010500	500	140	29.7x14.3	630	195	3300	6
60107010600	600	140	29.7x14.3	735	195	3600	4
60107010800	800	140	29.7x14.3	930	195	3900	4
60107011000	1000	140	29.7x14.3	1130	195	4200	4
60107011200	1200	140	29.7x14.3	1330	195	4450	4


Spannkraft
Clamping Force
max. 12000 N

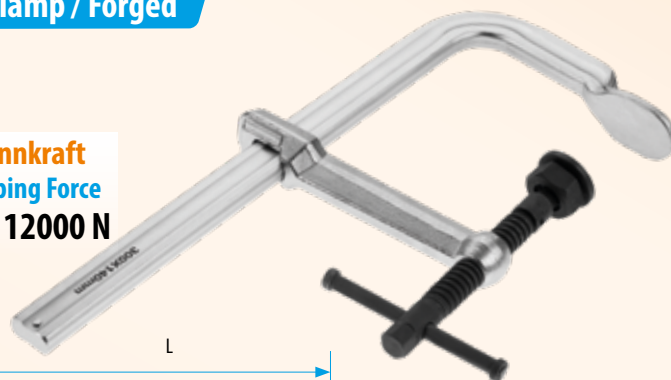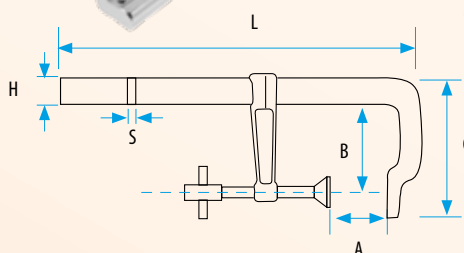

Schwere Ganzstahl-Schraubzwinge Heavy Duty Clamp / Forged

	A	B	HxS	L	C		
Code	(mm)	(mm)	(mm)	(mm)	(mm)	gr	
60107050200	200	140	29.7x14.3	330	195	2550	6
60107050250	250	140	29.7x14.3	375	195	2650	6
60107050300	300	140	29.7x14.3	435	195	2800	6
60107050400	400	140	29.7x14.3	530	195	3100	6
60107050500	500	140	29.7x14.3	630	195	3300	6
60107050600	600	140	29.7x14.3	735	195	3600	4
60107050800	800	140	29.7x14.3	930	195	3900	4
60107051000	1000	140	29.7x14.3	1130	195	4200	4
60107051200	1200	140	29.7x14.3	1330	195	4450	4

Spannkraft
Clamping Force
max. 12000 N

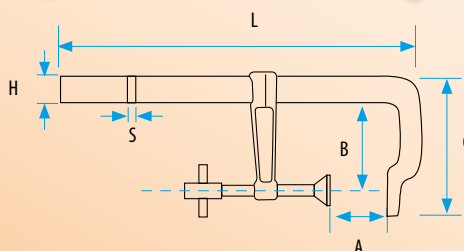

- verkupferte Spindel verhindert Anhaften von Schweißspritzern
- Copper-plated spindle prevents weld spatter from sticking